



DD-22 BASIC EM BASIC dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Galvanized drum as standard
Frequency inverter as standard



EFFICIENCY

Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Big door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components



OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved




OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DD-22 BASIC EM	
Capacity 1/18		Kg	24,4	
		lb	53,9	
Capacity 1/20		Kg	22	
		lb	48,5	
Ø Drum		mm	835	
		inch	32,9	
Drum length		mm	800	
		inch	31,5	
Drum volume		l	440	
		cu ft	15,54	
Ø Door hole		mm	574	
		inch	22,6	
Door center height		mm	1.030	
		inch	40,6	
Height from floor to bottom of door		mm	672	
		inch	26,46	
ELECTRIC HEATING				
Evaporation capacity		L/h	17	
		US gallon/h	4,49	
Hourly output		Kg/h	34	
		lb/h	74,96	
Installed heating power		kW	24	
Installed electrical power		kW	24,97	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	20	
		US gallon/h	5,28	
Hourly output (gas model)		Kg/h	40	
		lb/h	88,18	
Installed gas heating power		kcal/h	26655	
		Btu/h	105776	
Installed gas heating power		kW	31	
Installed electrical power		kW	0,97	
Instant propane gas consumption (G31)		Kg/h	2,66	
		lb/h	5,86	
Instant natural gas consumption (G20)		m³/h	3,28	
		cfm	1,93	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,55	
Nominal air flow rate		m³/h	1.200	
		cfm	706	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	2,4	
		Btu/h	8194	
Max. front heat emission		kW	1,7	
		Btu/h	5736	
CONNECTIONS			E	G
Tension 230V - I + N + T		Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	890 / 970	
		inch	35 / 38,2	



Net / gross depth	mm	1.255 / 1.345
	inch	49,4 / 53
Net height / gross height	mm	1.812 / 1.940
	inch	71,3 / 76,4
Net / gross weight	Kg	210 / 230
	lb	463 / 507
OTHERS		
Sound level	dB	65

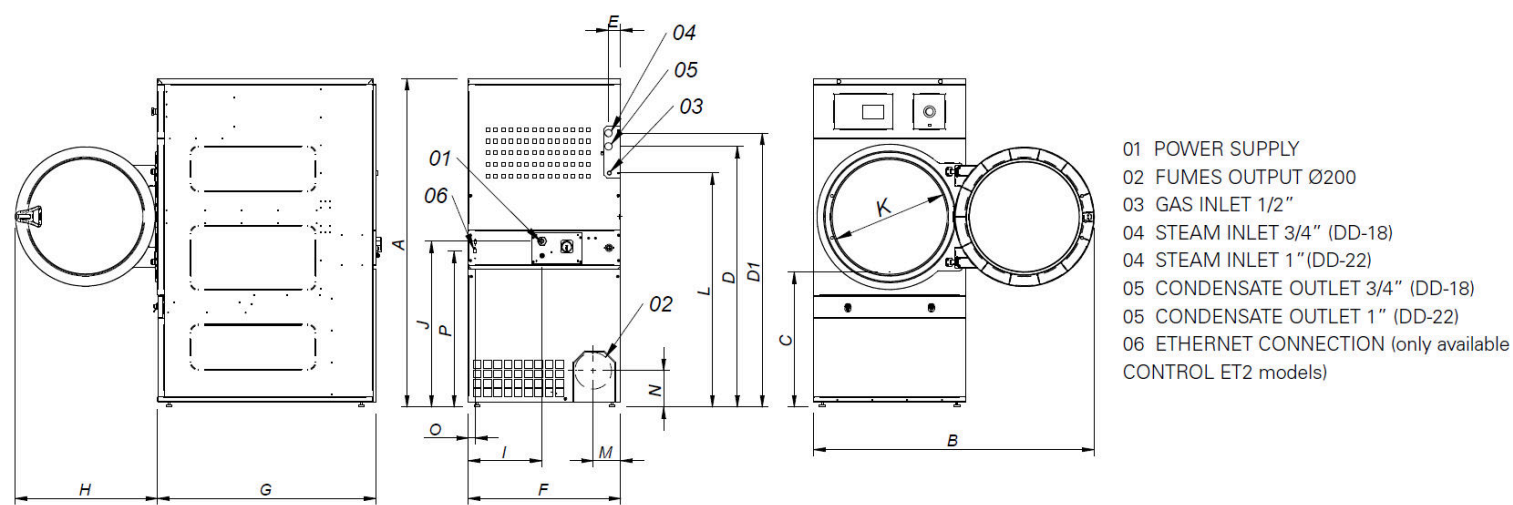

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-18	1694*	1447	689	1354	1422	68	68	785	1125	735	380	870	575	1226	133	180	35	805
DD-22	1812*	1552	743	1430	1532	112	55	890	1255	735	107	920	575	1344	238	180	37	860

* Measurement with legs mounted (30mm)

