

DPR-10 HPI ET2

Heat pump professional dryers



FEATURES

ET2 microprocessor: easy to use and fully programmable with 4.3" touch screen
Frequency control standard
Reverse drum action standard
USB port
Remote connection



VERSATILITY

OPL <> COIN
The same model can be easily transformed.
Ideal for many sectors: hotels, camp sites, self-service laundries, gyms, etc.



EFFICIENCY

CARE DRY: humidity sensor
Improved air flow system
Large fluff filter as a drawer
Efficient design



CONNECTIVITY

Standard Danube Online - IoT communication
Remote management for laundries: OPL and self-service



ROBUSTNESS

Outer casing in grey skinplate
Robust aluminium door
Drawer as a dirt filter (not in the door but in a dedicated drawer)
Industrial fan and powerful airflow
More robust construction of structure and panels



OTHERS

Heat pump heating
CE certified



OPTIONS


- SSD Stainless steel drum AISI-304
- SSC Stainless steel outer casing AISI-430
- RD reverse door opening
- TR Tropicalized model (ET2)
- IoT licence - Danube Online

CAPACITY & DRUM	UNIT.	DPR-10 HPi ET2
Capacity 1/18	Kg	11,1
	lb	24,5
Capacity 1/20	Kg	10
	lb	22
Ø Drum	mm	590
	inch	23,2
Drum length	mm	690
	inch	27,2
Drum volume	l	200
	cu ft	7,06
Ø Door hole	mm	480
	inch	18,9
Door center height	mm	918
	inch	36,1
Height from floor to bottom of door	mm	614
	inch	24,17
ELECTRIC HEATING		
Evaporation capacity	L/h	4,3
	US gallon/h	1,14
Hourly output	Kg/h	8,6
	lb/h	18,96
Installed heating power	kW	2
Installed electrical power	kW	2,74
Drum motor power*	kW	0,17
GAS HEATING		
Evaporation capacity	L/h	-
	US gallon/h	-
Hourly output	Kg/h	-
	lb/h	-
Installed gas heating power	kcal/h	-
	Btu/h	-
Installed gas heating power	kW	-
Installed electrical power	kW	-
Instant propane gas consumption (G31)	Kg/h	-
	lb/h	-
Instant natural gas consumption (G20)	m³/h	-
	cfm	-
Ø Gas inlet	BSPP ISO 228-1	-
VENTILATION		
Fan motor power*	kW	0,17
Nominal air flow rate	m³/h	Variable
	cfm	Variable
Ø Fume exhaust	mm	-
	inch	-
HEAT EMISSION		
Maximum total heat emission	kW	0,3
	Btu/h	1075
Max. front heat emission	kW	0,2
	Btu/h	753
CONNECTIONS		E
Tension 230V - I + N + T	Nº x mm² / A	3 x 4 / 32A
Tension 230V - III + T	Nº x mm² / A	-
Tension 400V - III + N + T	Nº x mm² / A	-
DIMENSIONS / PACKING DIMENSIONS		
Net / gross width	mm	680 / 710
	inch	26,8 / 28



Net / gross depth	mm	784 / 832
	inch	30,09 / 32,8
Net / gross height	mm	1.400 / 1.520
	inch	55,1 / 59,8
Net / gross weight	Kg	169 / 178
	lb	373 / 392
OTHERS		
Sound level	dB	61

* Single motor for drum and fan

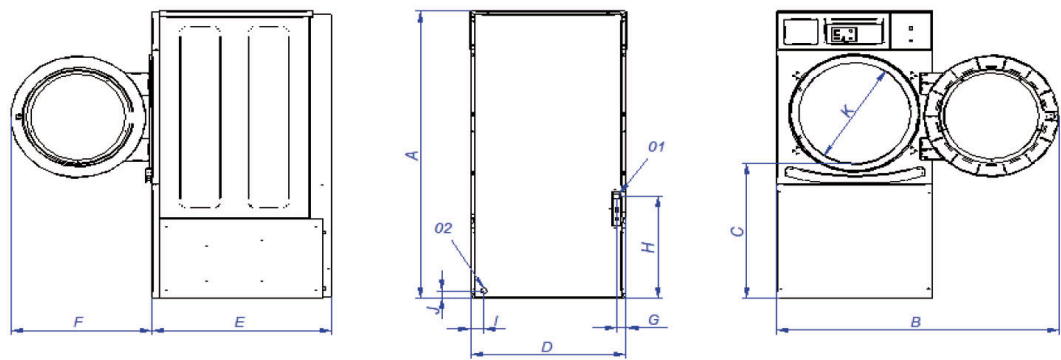

01. Electrical connection.
02. Condensed water evacuation.
3000 mm hose (1) and 12 mm inner diameter.
(1) For greater distances, consult the installation manual.

	A	B	C	D	E	F	G	H	I	J	K
DPR-8 HPi ET2	1.400	1.227	665	680	784	615	42	505	60	50	480
DPR-10 HPi ET2	1.400	1 227	665	680	784	615	42	505	60	50	480

