



STD-11 SILVER XP ET2

STD SILVER XP stack dryers



EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. Online platform free of charge
for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages



FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable
to coin laundry uses



CONNECTIVITY

Danube Online communication - IoT standard
Remote technical service
Management of laundries: OPL and COIN



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales
service, software updates, etc.
Easy access to components



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except STD-22 XP model: only gas)
CE approved



OPTIONS


- IMC CARE DRY Humidity sensor STD (1 unit per stack)
- DG Double door glass STD (1 unit per stack)
- FEX Sprinkler fire extinguisher STD (1 unit per stack)
- NG Natural gas heated tumble dryer (LPG as standard)
- TR Tropicalized model (ET2) (1 unit per stack)
- RD Opposite door opening STD (1 unit per stack)
- DS Perfumes dosing / spraying STD (1 unit per stack)
- AF Back panel with air filter (STD)
- 400V 3~ 50 Hz STD-11-18
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- 400V 3N 60 Hz STD-11-35
- 230V 3~ 60 Hz STD-11-18 G
- SSC Stainless steel outer casing 11 STD
- 230V 3~ 60 Hz STD-11-18 E
- 440V/480V 3~ 60 Hz STD-11-22
- SSF Stainless steel front panel STD 11-18
- WB Wooden packing STD-11
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.		STD-11 SILVER XP ET2	
Capacity 1/18		Kg		11,7 x 2	
		lb		25,8 x 2	
Capacity 1/20		Kg		10,5 x 2	
		lb		23,1 x 2	
Ø Drum		mm		750	
		inch		29,5	
Drum length		mm		475	
		inch		18,70	
Drum volume		l		210	
		cu ft		7,41	
Ø Door hole		mm		574	
		inch		22,6	
Door center height		mm		547 / 1522	
		inch		21,54 / 59,92	
Height from floor to bottom of door		mm		189 / 1164	
		inch		7,32 / 45,83	
ELECTRIC HEATING					
Evaporation capacity *		L/h *		13,5 x 2	
		US gallon/h *		3,56 x 2	
Hourly output**		Kg/h **		27 x 2	
		lb/h **		59,5 x 2	
Installed heating power		kW		12 x 2	
Installed electrical power		kW		25,34	
Drum motor power		kW		0,37 x 2	
GAS HEATING					
Evaporation capacity*		L/h		15,4 x 2	
		US gallon/h		4,05 x 2	
Hourly output **		Kg/h		30,8 x 2	
		lb/h		67,7 x 2	
Installed gas heating power		kcal/h		17627 x 2	
		Btu/h		69996 x 2	
		kW		20,5 x 2	
Installed electrical power		kW		1,34	
Instant LPG gas consumption (G31)		Kg/h		1,76 x 2	
		lb/h		3,88 x 2	
Instant natural gas consumption (G20)		m³/h		2,17 x 2	
		cfm		1,28 x 2	
Ø Gas inlet		BSPP ISO 228-1		3/4"	
VENTILATION					
Fan motor power		kW		0,25 x 2	
Nominal air flow rate		m³/h		500 x 2	
		cfm		294,28 x 2	
Ø Fume exhaust		mm		200	
		inch		7,87	
HEAT EMISSION					
Maximum total heat emission		kW		3,3	
		Btu/h		11198	
Max. front heat emission		kW		1,2	
		Btu/h		4199	
CONNECTIONS				E	G
Tension 230V - I + N + T		Nº x mm² / A		-	3 x 2,5 / 16A
Tension 230V - III + T		Nº x mm² / A		4 x 25 / 80A	3 x 2.5 / 16A (5*)
Tension 400V - III + N + T		Nº x mm² / A		5 x 16 / 50A	3 x 2.5 / 16A (6*)
NET DIMENSIONS / PACKING DIMENSIONS					
Net / gross width		mm		785 / 865	
		inch		30,9 / 34,1	



Net / gross depth	mm	1001 / 1084
	inch	39,4 / 42,7
Net / gross height	mm	1994 / 2126
	inch	78,5 / 83,7
Net / gross weight	Kg	284 / 295
	lb	626 / 650
OTHERS		
Max. sound level (1 m in front)	dB	64

- * Drying conditions: full load (1/20) of towels, drying temperature 90°C.
- ** Kg dry linen per hour, according to the above drying conditions.
- (5*) Connect 2 phases and earth
- (6*) Connect phase, neutral and earth

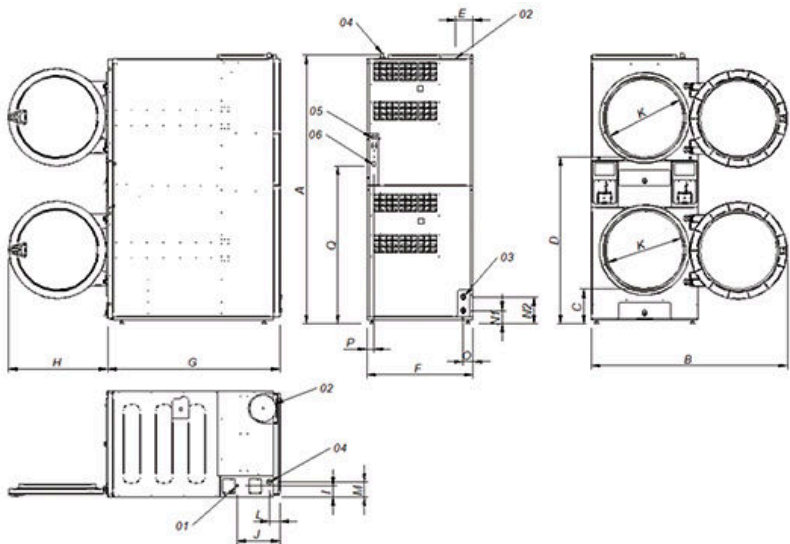

01. Power supply
02. Fumes extraction ø 200 mm
03. 2 sprinkler valves 3/4"
04. Gas inlet 1/2"
05. Ethernet connection (ET2 model only)
06. ON/OFF control switch

		A	B	C	D	E	F	G	H	I	J	K	L	M	N1	N2	O	P	Q
STD-11 XP	mm	1980	1447	259	1234	131	785	1001	735	83	318	575	77	113	97	197	73	54	1163
STD-14 XP	mm	1980	1447	259	1234	131	785	1135	735	83	318	575	77	113	97	197	73	54	1163
STD-18 XP	mm	1980	1447	259	1234	131	785	1271	735	83	318	575	77	113	97	197	73	54	1163

