



STD-22 SILVER XP ET2

STD SILVER XP stack dryers



EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. Online platform free of charge
for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages



FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable
to coin laundry uses



CONNECTIVITY

Danube Online communication - IoT standard
Remote technical service
Management of laundries: OPL and COIN



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales
service, software updates, etc.
Easy access to components



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except STD-22 XP model: only gas)
CE approved



OPTIONS


- IMC CARE DRY Humidity sensor STD (1 unit per stack)
- DG Double door glass STD (1 unit per stack)
- FEX Sprinkler fire extinguisher STD (1 unit per stack)
- NG Natural gas heated tumble dryer (LPG as standard)
- TR Tropicalized model (ET2) (1 unit per stack)
- RD Opposite door opening STD (1 unit per stack)
- DS Perfumes dosing / spraying STD (1 unit per stack)
- AF Back panel with air filter (STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- 400V 3N 60 Hz STD-11-35
- 440V/480V 3~ 60 Hz STD-11-22
- SSC Stainless steel outer casing 22 STD
- SSF Stainless steel front panel STD 22
- WB Wooden packing STD-22
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.		STD-22 SILVER XP ET2	
Capacity 1/18		Kg		24,3 x 2	
		lb		53,5 x 2	
Capacity 1/20		Kg		21,9 x 2	
		lb		48,3 x 2	
Ø Drum		mm		835	
		inch		32,9	
Drum length		mm		800	
		inch		31,5	
Drum volume		l		440	
		cu ft		15,54	
Ø Door hole		mm		574	
		inch		22,6	
Door center height		mm		574 / 1618	
		inch		22,60 / 63,70	
Height from floor to bottom of door		mm		214 / 1258	
		inch		8,46 / 49,53	
ELECTRIC HEATING					
Evaporation capacity *		L/h *		-	
		US gallon/h *		-	
Hourly output**		Kg/h **		-	
		lb/h **		-	
Installed heating power		kW		-	
Installed electrical power		kW		-	
Drum motor power		kW		0,37 x 2	
GAS HEATING					
Evaporation capacity*		L/h		22 x 2	
		US gallon/h		5,81 x 2	
Hourly output **		Kg/h		44 x 2	
		lb/h		97 x 2	
Installed gas heating power		kcal/h		26139 x 2	
		Btu/h		103798 x 2	
		kW		30,4 x 2	
Installed electrical power		kW		1,94	
Instant LPG gas consumption (G31)		Kg/h		2,61 x 2	
		lb/h		5,75 x 2	
Instant natural gas consumption (G20)		m³/h		3,22 x 2	
		cfm		1,89 x 2	
Ø Gas inlet		BSPP ISO 228-1		3/4"	
VENTILATION					
Fan motor power		kW		0,55 x 2	
Nominal air flow rate		m³/h		900 x 2	
		cfm		529,72 x 2	
Ø Fume exhaust		mm		250	
		inch		9,84	
HEAT EMISSION					
Maximum total heat emission		kW		5	
		Btu/h		16934	
Max. front heat emission		kW		1,9	
		Btu/h		6350	
CONNECTIONS				E	G
Tension 230V - I + N + T		Nº x mm² / A		-	3 x 2,5 / 20A
Tension 230V - III + T		Nº x mm² / A		-	3 x 2,5 / 20A (5*)
Tension 400V - III + N + T		Nº x mm² / A		-	3 x 2,5 / 20 (6*)
NET DIMENSIONS / PACKING DIMENSIONS					
Net / gross width		mm		870 / 950	
		inch		34,3 / 37,4	



Net / gross depth	mm	1312 / 1395
	inch	51,7 / 54,9
Net / gross height	mm	2118 / 2250
	inch	83,4 / 88,6
Net / gross weight	Kg	374 / 389
	lb	823 / 856
OTHERS		
Max. sound level (1 m in front)	dB	69

- * Drying conditions: full load (1/20) of towels, drying temperature 90°C.
- ** Kg dry linen per hour, according to the above drying conditions.
- (5*) Connect 2 phases and earth
- (6*) Connect phase, neutral and earth

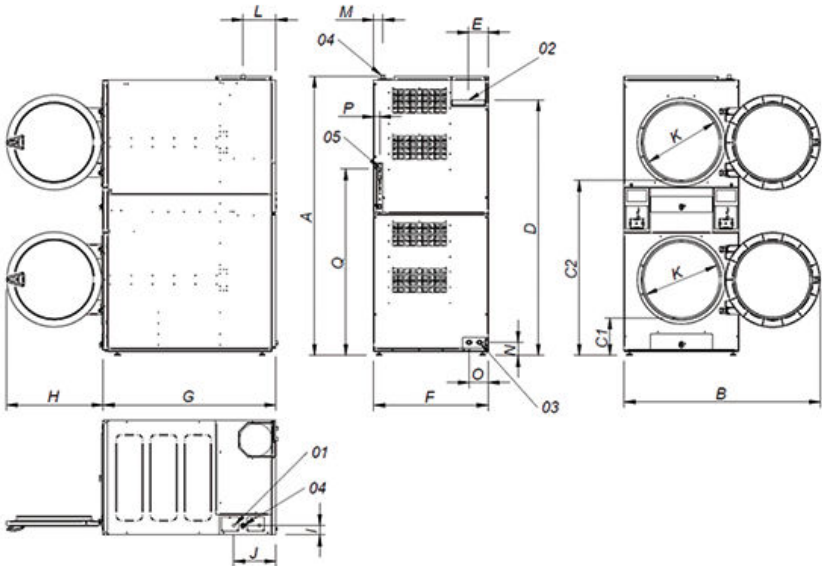

01. Power supply
02. Fumes extraction ø 250 mm
03. 2 sprinkler valves 3/4"
04. Gas inlet 1/2"
05. Ethernet connection (ET2 model only)

STD-22 XP	mm	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
		2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	100	145	45	1416

