

STD-22 BRONZE XP EM

STD BRONZE XP stack dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry use



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Biggest door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (option)
Easy access to components



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except STD-22 XP model: only gas)
CE approved



OPTIONS


- DG Double door glass STD (1 unit per stack)
- BMS New display for EM programmer (2 units for STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- NG Natural gas heated tumble dryer (LPG as standard)
- SSC Stainless steel outer casing 22 STD
- 400V 3N 60 Hz STD-11-35
- SSF Stainless steel front panel STD 22
- 440V/480V 3~ 60 Hz STD-11-22
- WB Wooden packing STD-22
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.		STD-22 BRONZE XP EM	
Capacity 1/18		Kg		24,3 x 2	
		lb		53,5 x 2	
Capacity 1/20		Kg		21,9 x 2	
		lb		48,3 x 2	
Ø Drum		mm		835	
		inch		32,9	
Drum length		mm		800	
		inch		31,5	
Drum volume		l		440	
		cu ft		15,54	
Ø Door hole		mm		574	
		inch		22,6	
Door center height		mm		574 / 1618	
		inch		22,60 / 63,70	
Height from floor to bottom of door		mm		214 / 1258	
		inch		8,46 / 49,53	
ELECTRIC HEATING					
Evaporation capacity *		L/h *		-	
		US gallon/h *		-	
Hourly output**		Kg/h **		-	
		lb/h **		-	
Installed heating power		kW		-	
Installed electrical power		kW		-	
Drum motor power		kW		0,37 x 2	
GAS HEATING					
Evaporation capacity*		L/h		22 x 2	
		US gallon/h		5,81 x 2	
Hourly output **		Kg/h		44 x 2	
		lb/h		97 x 2	
Installed gas heating power		kcal/h		26139 x 2	
		Btu/h		103798 x 2	
		kW		30,4 x 2	
Installed electrical power		kW		1,94	
Instant LPG gas consumption (G31)		Kg/h		2,61 x 2	
		lb/h		5,75 x 2	
Instant natural gas consumption (G20)		m³/h		3,22 x 2	
		cfm		1,89 x 2	
Ø Gas inlet		BSPP ISO 228-1		3/4"	
VENTILATION					
Fan motor power		kW		0,55 x 2	
Nominal air flow rate		m³/h		900 x 2	
		cfm		529,72 x 2	
Ø Fume exhaust		mm		250	
		inch		9,84	
HEAT EMISSION					
Maximum total heat emission		kW		5	
		Btu/h		16934	
Max. front heat emission		kW		1,9	
		Btu/h		6350	
CONNECTIONS				E	G
Tension 230V - I + N + T		Nº x mm² / A		-	3 x 2,5 / 20A
Tension 230V - III + T		Nº x mm² / A		-	3 x 2,5 / 20A (5*)
Tension 400V - III + N + T		Nº x mm² / A		-	3 x 2,5 / 20 (6*)
NET DIMENSIONS / PACKING DIMENSIONS					
Net / gross width		mm		870 / 950	
		inch		34,3 / 37,4	



Net / gross depth	mm	1312 / 1395
	inch	51,7 / 54,9
Net / gross height	mm	2118 / 2250
	inch	83,4 / 88,6
Net / gross weight	Kg	374 / 389
	lb	823 / 856
OTHERS		
Max. sound level (1 m in front)	dB	69

- * Drying conditions: full load (1/20) of towels, drying temperature 90°C.
- ** Kg dry linen per hour, according to the above drying conditions.
- (5*) Connect 2 phases and earth
- (6*) Connect phase, neutral and earth

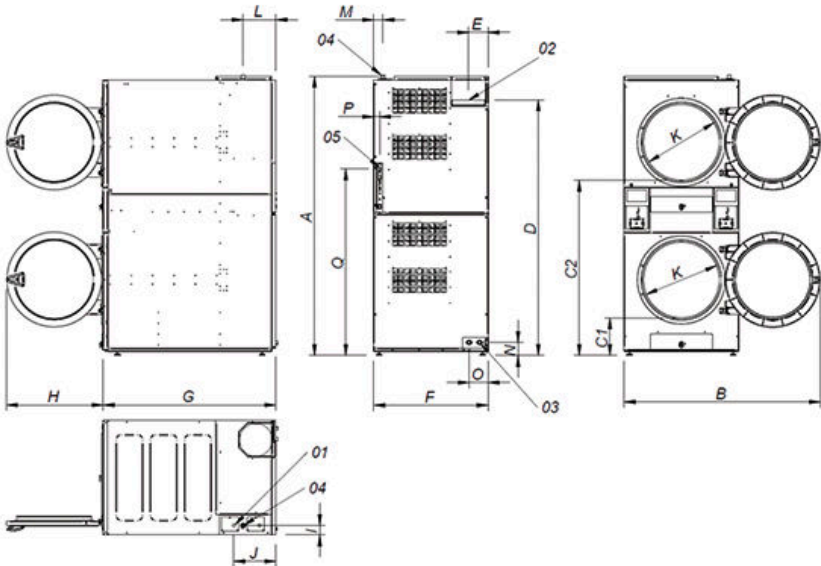

01. Power supply
02. Fumes extraction ø 250 mm
03. 2 sprinkler valves 3/4"
04. Gas inlet 1/2"
05. Ethernet connection (ET2 model only)

STD-22 XP	mm	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
		2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	100	145	45	1416

