



**R2D18-120N**

**ø 180 mm wall ironers**



## **ELECTRONIC CONTROL**

Simple and user friendly : Start/stop button, selection of 4 temperatures  
Preset ironing speeds, not adjustable



## **FEATURES**

Large roll contact area with the linen  
Roll lifting control by pedal  
Two available models:  
• Standard model: roll with cotton polyester coating  
• Nomex Model: roll with Nomex coating



## **ROBUSTNESS**

Nomex quality coating: resistant to high temperatures  
Panels in grey skinplate and stainless steel  
Wooden feeding board



## **EFFICIENCY**

Acoustic comfort : <55 dB  
Minimum space requirement: space saving, suitable for small spaces  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels, etc.



## **MAINTENANCE**

Easy installation : requires only an electrical connection  
Easy access on both sides for maintenance





## **OTHERS**

Front feeding and return  
Roll ø 180 mm  
Working widths: 1.000 and 1.200 mm  
Electric heating  
CE certification



| GENERAL DETAILS                        |  | UNIT.       | R2D18-120N    |
|----------------------------------------|--|-------------|---------------|
| Theoretical production 20-25% humidity |  | Kg/h        | 20            |
|                                        |  | Lb/h        | 44,09         |
| Roll Ø                                 |  | mm          | 180           |
|                                        |  | Inch        | 7,09          |
| Working width                          |  | mm          | 1.200         |
|                                        |  | Inch        | 39,37         |
| Working speed                          |  | m/min       | 2,02          |
|                                        |  | ft/min      | 6,62          |
| Nomex quality coating                  |  | -           | YES           |
| Electronic control                     |  | -           | YES           |
| Chest motion                           |  | -           | Manual        |
| POWER                                  |  |             |               |
| Heating power                          |  | Kw          | 4             |
| Roll motor power                       |  | Kw          | 0,03          |
| Fan motor power                        |  | Kw          | -             |
| Total electric power                   |  | Kw          | 4,03          |
| CONNEXIONS                             |  |             |               |
| Tension 230V I + N + T                 |  | n° x mm² /A | 3 x 4 / 20A   |
|                                        |  | n° x AWG/A  | 3 x 11 / 20A  |
| Tension 230V III + T                   |  | n° x mm² /A | N/A           |
|                                        |  | n° x AWG/A  | N/A           |
| Tension 400V III + N + T               |  | n° x mm² /A | N/A           |
|                                        |  | n° x AWG/A  | N/A           |
| DIMENSIONS / DIMENSIONS WITH PACKAGING |  |             |               |
| Net width / Gross width                |  | mm          | 1.570 / 1.690 |
|                                        |  | Inch        | 62 / 67       |
| Net depth / Gross depth                |  | mm          | 438 / 540     |
|                                        |  | Inch        | 17 / 21       |
| Net height / Gross height              |  | mm          | 952 / 1.130   |
|                                        |  | Inch        | 37 / 44       |
| Net weight / Gross weight              |  | Kg          | 90 / 110      |
|                                        |  | Lb          | 198 / 243     |
| Volume                                 |  | m³          | 0,65 / 1,03   |
|                                        |  | ft3         | 22,95 / 36,37 |
| OTHERS                                 |  |             |               |
| Number of fume outlets                 |  | NO          | -             |
| Ø fume outlets                         |  | mm          | -             |
| Air flow (suction)                     |  | m3/h        | -             |
| Noise level                            |  | dB          | 55            |

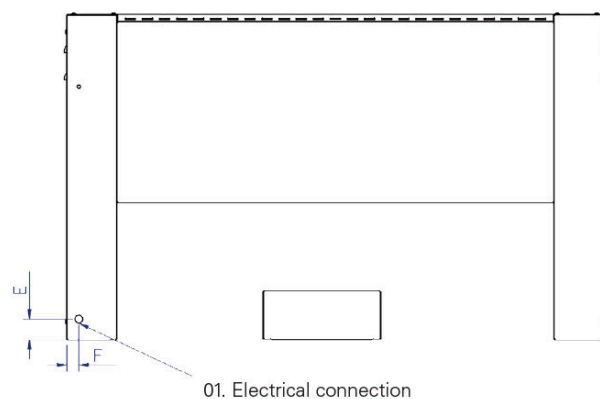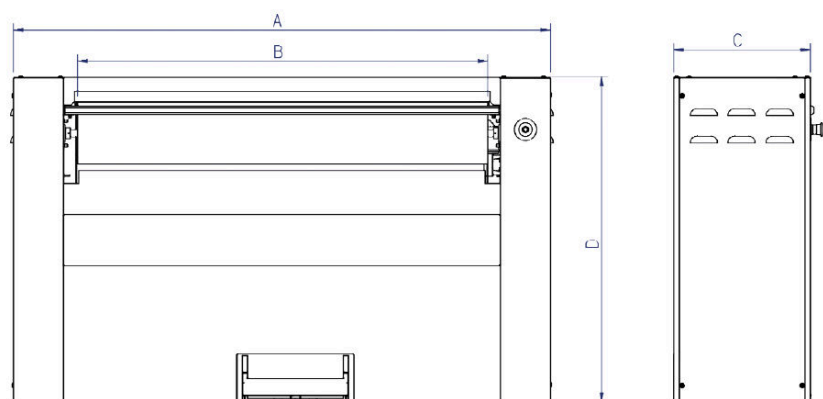

|           | A    | B    | C   | D   | E  | F  |
|-----------|------|------|-----|-----|----|----|
| R2D18/100 | 1370 | 1000 | 400 | 952 | 60 | 35 |
| R2D18/120 | 1570 | 1200 | 400 | 952 | 60 | 35 |

