



R2D25-120 N ø 250mm wall ironers



ELECTRONIC CONTROL

Simple and user friendly: digital screen, precise control of temperature
Preset ironing speeds, not adjustable



FEATURES

Large roll contact area with the linen
Automatic roll lifting control by foot photocell detection
Two available models:

- Standard: roll with cotton polyester coating
- Nomex: roll with Nomex coating



ROBUSTNESS

Nomex coating: resistant to high temperatures
Panels in grey skinplate and stainless steel
Wooden feeding board
New kinematics: better reliability
Industrial components: more durable



EFFICIENCY

Acoustic comfort : 55 dB
Minimum space requirement: space saving, suitable for small spaces
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels, etc.



MAINTENANCE

Easy installation : requires only an electrical connection
Easy access on both sides for maintenance
Quick and easy dismantling of bearings



OTHERS


Front feeding and return
Roll ø 250 mm
Working widths: 1.400 and 2.000 mm
Electric heating
CE certification



OPTIONS

- FP Pedal control instead of photocell R2D25 (except GOLD)
- 230V I + N 50Hz - ø 250 mm only (except 200 mm model)
- 400-230V +N+T 60Hz - ø 250 mm only
- 440V III 60Hz No neutral (marine) - ø 250 mm only

GENERAL DETAILS		UNIT.	R2D25-120 N
Theoretical production 20-25% humidity		Kg/h	27,5
		Lb/H	60,63
Roll Ø		mm	250
		Inch	9,84
Working width		mm	1.200
		Inch	47,24
Working speed		m/min	4,2
		ft/mn	13,77
-	YES		
Electronic control	-	YES	
-	AUTO		
POWER			
Heating power	Kw	6	
Roll motor power	Kw	0,18	
Fan motor power	Kw	-	
Total electric power	Kw	6,18	
CONNEXIONS			
Tension 230V I + N + T	nº x mm² /A	3 x 6 / 32A	
	nº x AWG/A	3 x 9 / 32A	
Tension 230V III + T	nº x mm² /A	4 x 4 / 20A	
	nº x AWG/A	4 x 11 / 20A	
Tension 400V III + N + T	nº x mm² /A	5 x 2,5 / 10A	
	nº x AWG/A	5 x 13 / 10A	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1.662 / 1.690	
	Inch	65 / 67	
Net depth / Gross depth	mm	484 / 540	
	Inch	19 / 21	
Net height / Gross height	mm	985 / 1.130	
	Inch	39 / 44	
Net weight / Gross weight	Kg	124 / 134	
	Lb	273 / 295	
Volume	m³	0,79 / 1,03	
	fr3	27,90 / 36,37	
OTHERS			
NO	-		
mm	-		
Inch	-		
m3/h	-		
cfm	-		
Noise level	dB	55	

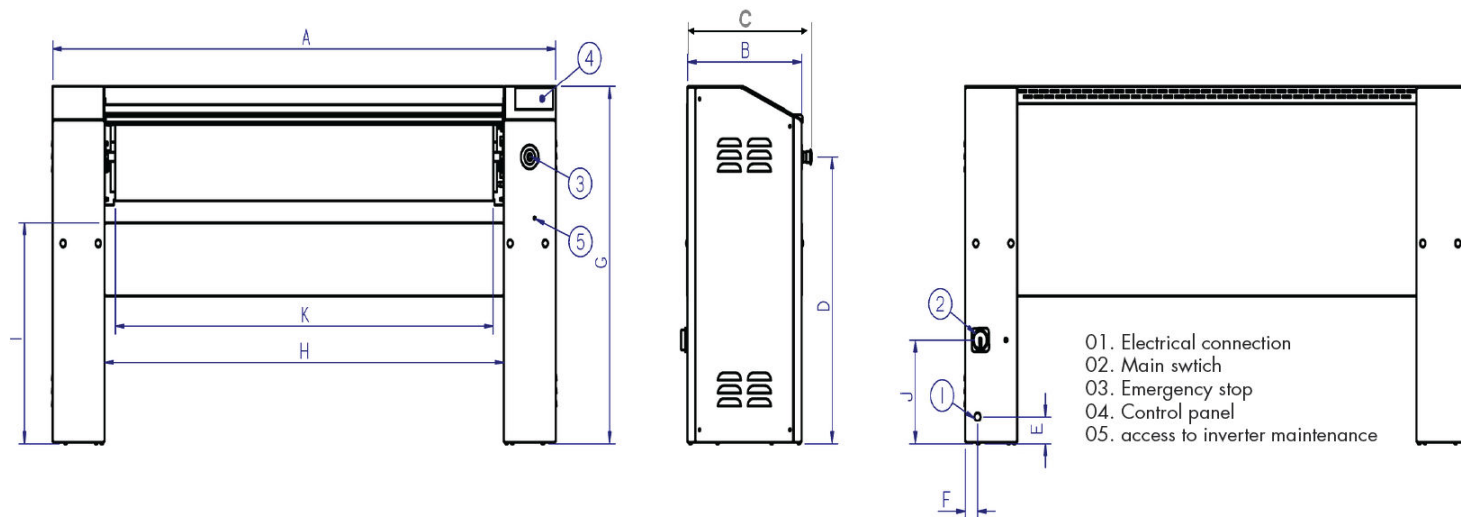

	A	B	C	D	E	F	G	H	I	J	K
R2D25/100	1.462	423	484	791	75	45	985	1.079	610	287	998
R2D25/120	1.662	423	484	791	75	45	985	1.279	610	287	1.198
R2D25/140	1.862	423	484	791	75	45	985	1.479	610	287	1.398
R2D25/200	2.462	423	484	791	75	45	985	2.079	610	287	1.998