

D-26 GOLD

GOLD ø 325 mm flatwork ironers



ELECTRONIC CONTROL

BM control, simple and user friendly, 2 selectable operating modes:

AUTO mode : automatic management of ironing speed according to the selected temperature.

MANUAL mode: selection of temperature and speed



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure

Automatic shutdown at 80°C (adjustable parameter)

Fumes circulation circuit from the bottom reducing energy consumption

Gas radiant burners: + 33% more productive



ROBUSTNESS

Roll driving by speed inverter

Nomex quality feeding and ironing belts: high temperatures resistant

Panels in skinplate and stainless steel.

Coiled felt for greater lifespan

Nickel plate roll as option: anticorrosive, more durable



ERGONOMICS

Acoustic comfort : <65 dB

Appropriate operating height: 990 mm feeding belts

Minimal encumbrance: space saving, suitable for most spaces

Electronic control with Auto mode: easy to use, optimized ironing speed



MAINTENANCE

Easy access to all components on both sides of the machine

Basic connections : electrical connection and air extraction



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation

Front feeding and return


Built-in cool down system

Polished steel roll ø 325 mm

Working widths: 2.000, 2.600 and 2.600 mm

Electric or radiant gas heating

CE standard

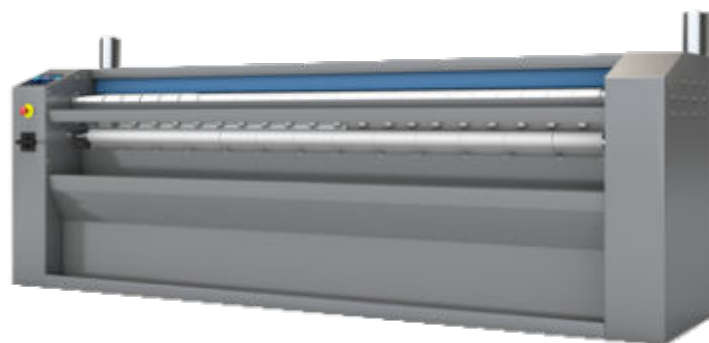

OPTIONS


- IMC CARE IRON humidity control - ø 325 mm
- NI Nickel plate roll D-26 GOLD
- LPG Propan gas for radiant gas model
- NG Natural gas for radiant gas model
- 230V I N 50 Hz (D-26 GOLD GR)
- 230V I N 60 Hz (D-26 GOLD GR)
- 230V III 50-60 Hz (D-26 GOLD E)
- 440V 50-60 Hz (D-26 GOLD E)

GENERAL DETAILS	UNIT.	D-26 GOLD	
Theoretical production Electric heating*	Kg/h	60	
	lb/h	132	
Theoretical production Gas atmo heating*	Kg/h	N/A	
	lb/h	N/A	
Theoretical production Radiant gas heating*	Kg/h	75	
	lb/l	165	
Roll Ø	mm	325	
	inch	12,80	
Working width	mm	2.600	
	inch	102,4	
Height floor-feeding belts	mm	990	
	inch	39,0	
Working speed	m/min	1,5-12	
	ft/min	4.9-39	
Electronic control	-	YES	
No. Programs	-	2	
Length folder	-	N/A	
Large surface contact with linen	-	270°	
POWER			
Electric mod.: heating power	Kw	40,5	
Electric mod: Total electric power	Kw	41,02	
Gas mod.: heating power	Kw	55	
Gas mod.: total electric power	Kw	0,77	
Steam mod.: heating power	Kg/h	-	
Roll motor power	Kw	0,41	
Fan motor power	Kw	0,18 x 2	
CONNECTIONS		E	G
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 6A
	nº x AWG/A	N/A	3 x 13 / 6A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 125A	4 x 2,5 / 6A
	nº x AWG/A	4 x 3 / 100A	3 x 13 / 6A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	5 x 2,5 / 6A
	nº x AWG/A	5 x 5 / 63A	5 x 13 / 6A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	-	
Ø Condensed (Steam models)	BSP	-	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	3.202 / 3.430	
	inch	126,1 / 135,0	
Net depth / gross depth	mm	686 / 770	
	inch	27 / 30,3	
Net height / gross height	mm	1.112 / 1.400	
	inch	43,8 / 55,1	
Net weight / gross weight	kg	545 / 585	
	lbs	1.202 / 1.290	
Net volume / Gross volume	m³	2,44 / 3,70	
	f³	86,26 / 130,58	
OTHERS			
No. Fume outlet	Nº	2	
Ø Fume outlet	mm	98	
	inch	3,86	
Air Flow	m³/h	1.000	
	cfm	589	
Sound level	dB	63	
Evaporation power	l/h	34	
	USgallon/h	8,9	
Additional ELECTRIC POWER with folder option	-	-	



Additional ELECTRIC POWER with folder+rear exit option	-	-
--	---	---

* Theoretical production with 45% moisture

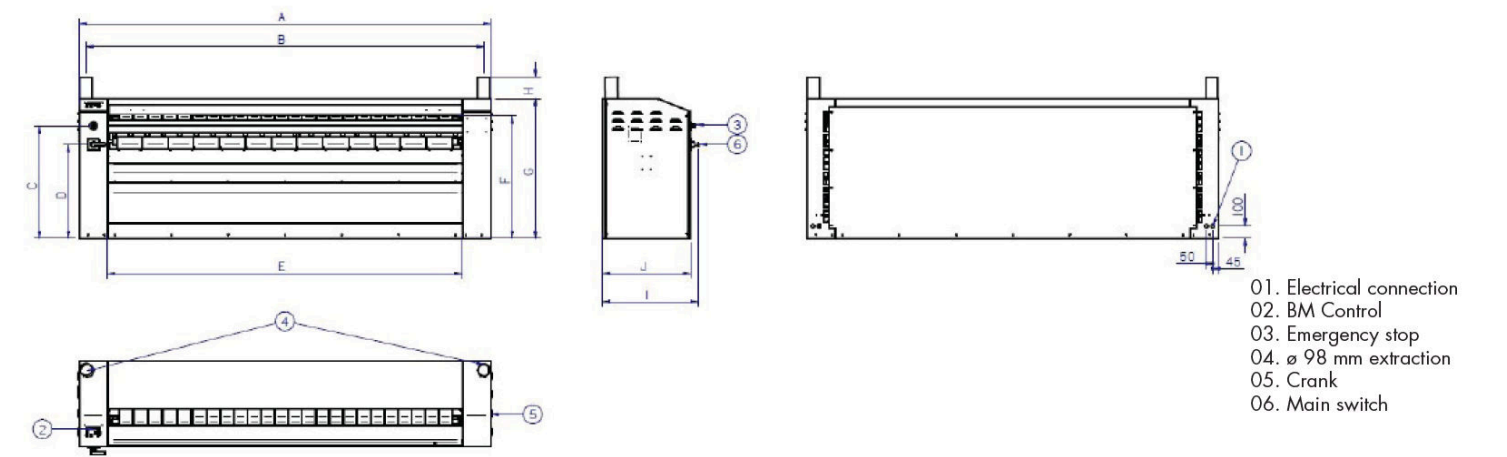

	A	B	C	D	E	F	G	H	I	J
D-20 GOLD	2.552	2.446	900	750	2.110	980	1.112	140	746	686
D-26 GOLD	3.202	3.096	900	750	2.760	980	1.112	140	746	686
D-33 GOLD	3.852	3.746	900	750	3.410	980	1.112	140	746	686

